


Cotation : TEREX DEMAG AC 40-2L




	A*	B*	C*	D*	E	a	b
14.00 x 25	3350	2475	1580	3350	2550	11°	11°
16.00 x 25	3400	2525	1630	3400	2550	13°	13°
20.5 x 25	3400	2525	1630	3400	2850	13°	13°

* Suspension abaissée à 80 mm

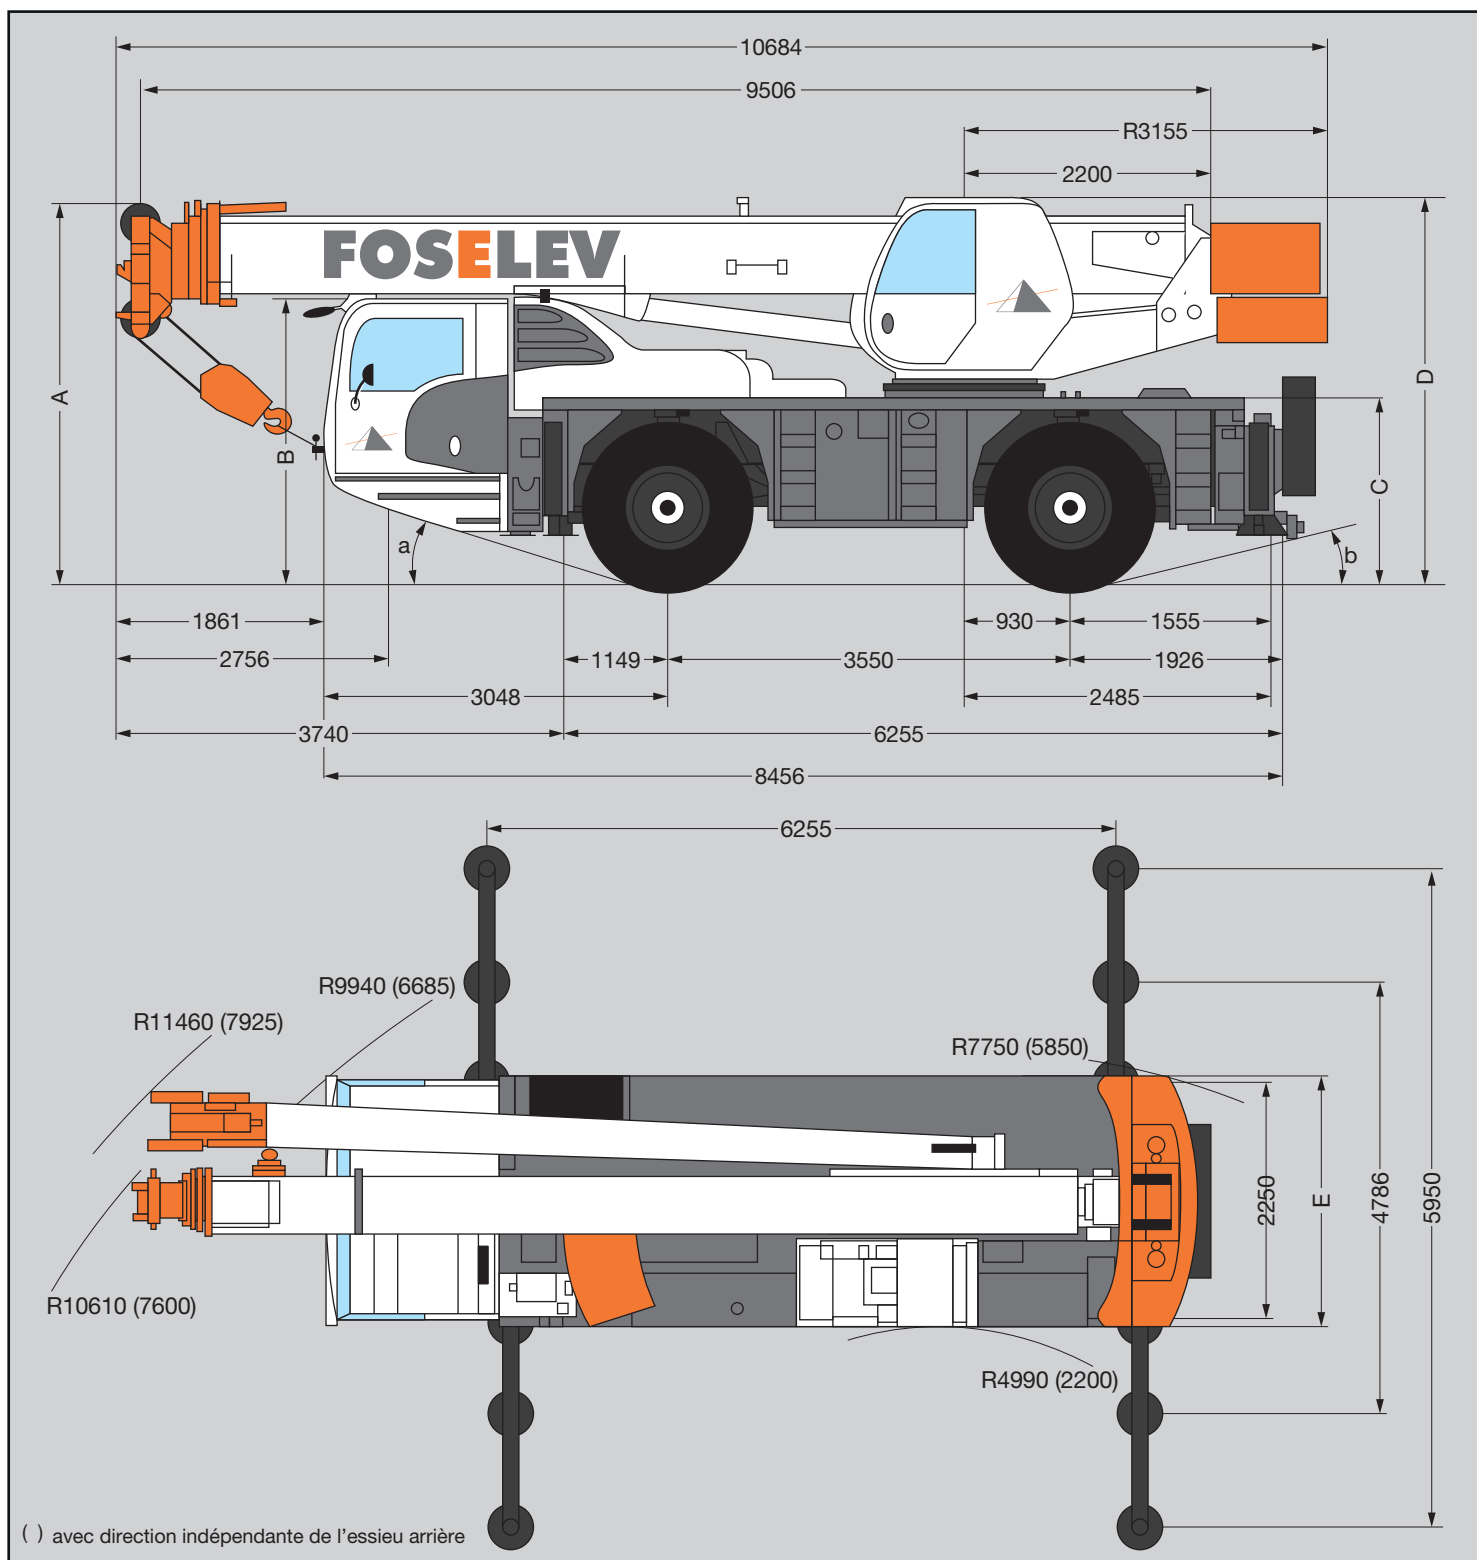

AC 40-2L

Hauteurs et capacités de levage : Flèche principale

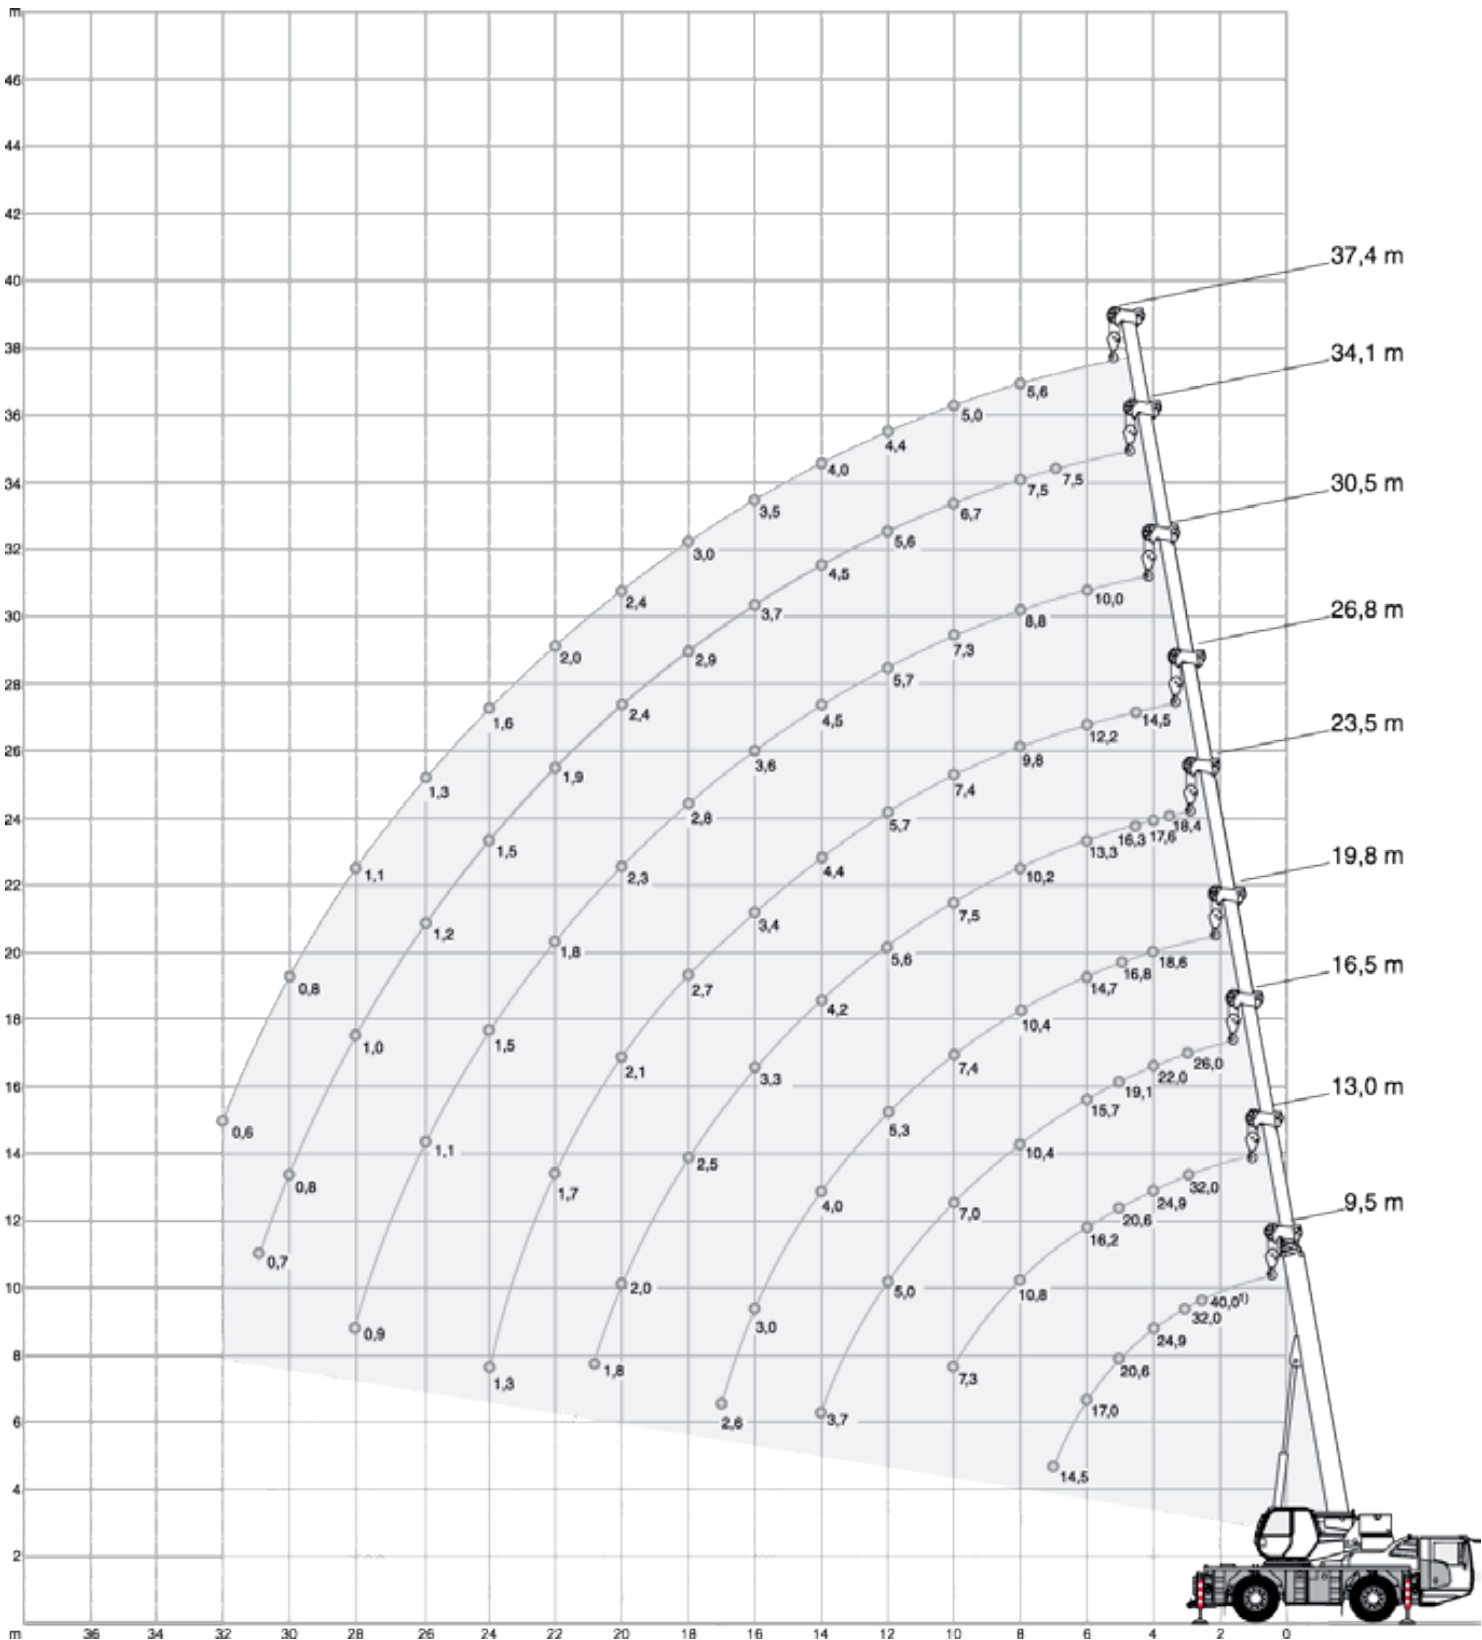

Hauteurs et capacités de levage : Flèche principale


5,5 t		6,20 x 5,95 m				360°				ISO	
	 (m)	9,50	13,00	16,50	19,80	23,50	26,80	30,50	34,10	37,40	
m	t	t	t	t	t	t	t	t	t	t	m
2,6	40,00 ¹⁾	-	-	-	-	-	-	-	-	-	2,6
3,0	35,00 ¹⁾	-	-	-	-	-	-	-	-	-	3,0
3,0	32,00	32,00	25,95	18,95	-	-	-	-	-	-	3,0
3,5	27,45	27,45	23,70	18,35	18,40	-	-	-	-	-	3,5
4,0	24,90	24,90	22,00	18,60	17,55	-	-	-	-	-	4,0
4,5	22,60	22,60	20,45	17,95	16,25	14,45	-	-	-	-	4,5
5,0	20,60	20,60	19,05	16,75	15,15	13,85	-	-	-	-	5,0
6,0	17,00	17,85	17,25	14,70	13,30	12,20	10,00	-	-	-	6,0
7,0	14,45	14,95	14,60	12,75	11,80	10,90	9,65	7,45	-	-	7,0
8,0	-	11,85	12,15	11,65	10,20	9,75	8,80	7,45	5,55	-	8,0
9,0	-	9,75	10,00	10,10	8,70	8,55	8,00	7,05	5,35	-	9,0
10,0	-	8,15	8,40	8,55	7,50	7,40	7,30	6,70	5,00	-	10,0
11,0	-	-	7,20	7,35	6,95	6,50	6,40	6,15	4,65	-	11,0
12,0	-	-	6,25	6,40	6,50	5,70	5,70	5,60	4,40	-	12,0
13,0	-	-	5,45	5,60	5,70	5,25	5,05	5,00	4,15	-	13,0
14,0	-	-	4,85	4,95	5,05	4,95	4,50	4,50	3,95	-	14,0
15,0	-	-	-	4,40	4,50	4,60	4,00	4,05	3,70	-	15,0
16,0	-	-	-	3,95	4,05	4,10	3,55	3,65	3,45	-	16,0
17,0	-	-	-	3,55	3,65	3,70	3,15	3,25	3,25	-	17,0
18,0	-	-	-	-	3,30	3,35	2,80	2,90	3,00	-	18,0
19,0	-	-	-	-	3,00	3,05	2,50	2,60	2,70	-	19,0
20,0	-	-	-	-	2,75	2,80	2,25	2,35	2,40	-	20,0
21,0	-	-	-	-	2,50	2,55	2,00	2,25	2,15	-	21,0
22,0	-	-	-	-	-	2,35	1,80	2,10	1,95	-	22,0
23,0	-	-	-	-	-	2,15	1,60	1,95	1,75	-	23,0
24,0	-	-	-	-	-	1,95	1,45	1,75	1,60	-	24,0
25,0	-	-	-	-	-	-	1,35	1,60	1,45	-	25,0
26,0	-	-	-	-	-	-	1,25	1,45	1,30	-	26,0
27,0	-	-	-	-	-	-	1,15	1,35	1,15	-	27,0
28,0	-	-	-	-	-	-	1,05	1,20	1,05	-	28,0
29,0	-	-	-	-	-	-	-	1,10	0,90	-	29,0
30,0	-	-	-	-	-	-	-	1,00	0,80	-	30,0
31,0	-	-	-	-	-	-	-	0,90	0,70	-	31,0
32,0	-	-	-	-	-	-	-	-	0,60	-	32,0
33,0	-	-	-	-	-	-	-	-	0,55	-	33,0

¹⁾ Sur l'arrière



AC 40-2L

Hauteurs et capacités de levage : Flèche principale + fléchette

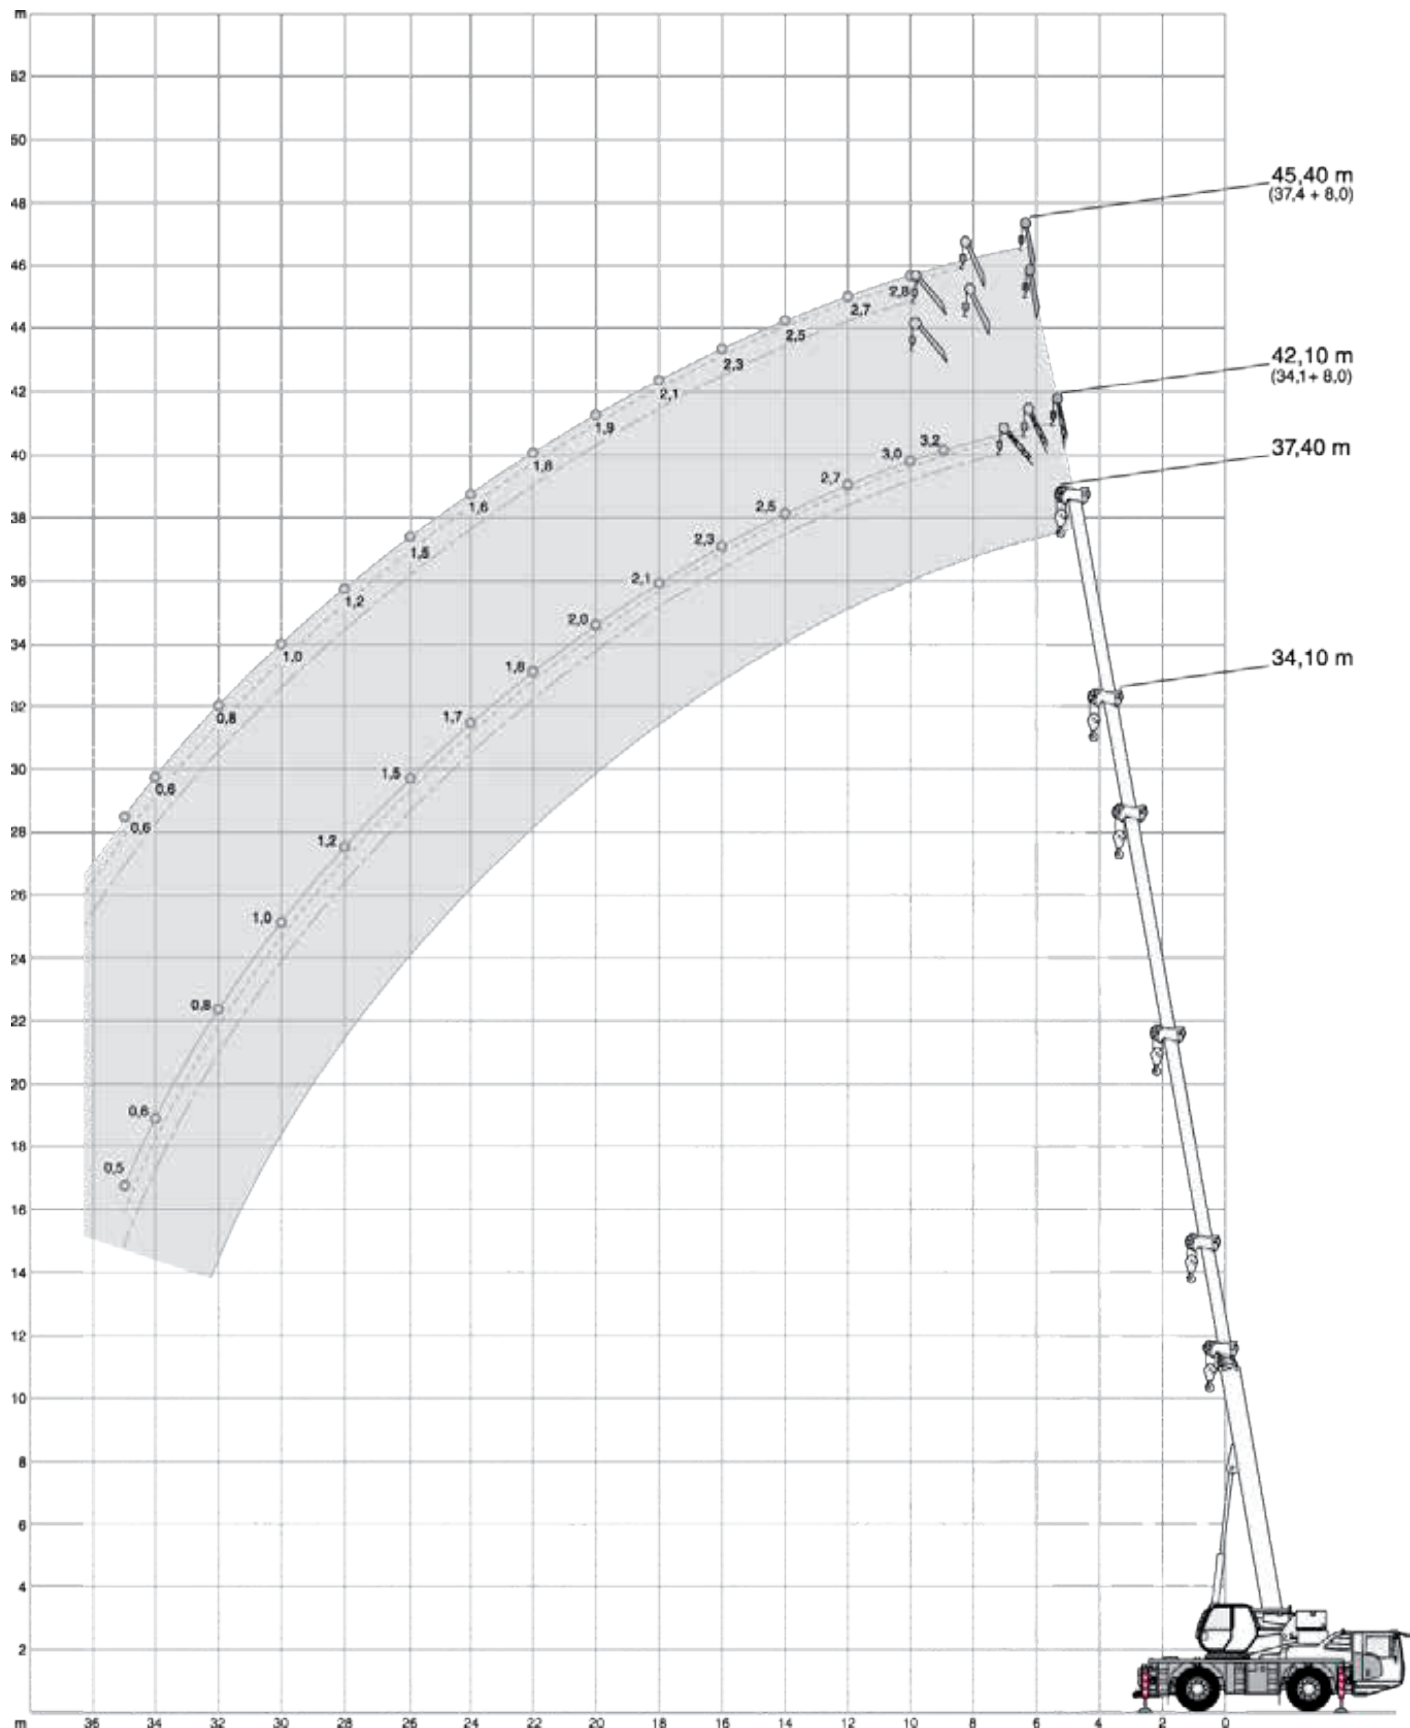

AC 40-2L

Hauteurs et capacités de levage : Flèche principale + fléchette

5,5 t					6,20 x 5,95 m					360°					ISO				
 34,10 m										 37,40 m									
		8,0 m										8,0 m							
		0°	20°	40°								0°	20°	40°					
m		t	t	t						m		t	t	t					
9,0		3,20	-	-						10,0		2,80	-	-					
10,0		3,00	-	-						11,0		2,70	-	-					
11,0		2,90	1,90	-						12,0		2,70	1,80	-					
12,0		2,70	1,80	-						13,0		2,60	1,75	-					
13,0		2,60	1,75	1,40						14,0		2,50	1,70	1,35					
14,0		2,45	1,70	1,35						15,0		2,35	1,65	1,35					
15,0		2,35	1,65	1,35						16,0		2,25	1,60	1,30					
16,0		2,25	1,60	1,30						17,0		2,15	1,60	1,30					
17,0		2,15	1,55	1,30						18,0		2,05	1,55	1,25					
18,0		2,10	1,55	1,25						19,0		1,95	1,50	1,25					
19,0		2,00	1,50	1,25						20,0		1,85	1,50	1,25					
20,0		1,95	1,45	1,25						21,0		1,80	1,45	1,25					
21,0		1,85	1,45	1,25						22,0		1,75	1,40	1,20					
22,0		1,80	1,40	1,20						23,0		1,65	1,40	1,20					
23,0		1,75	1,40	1,20						24,0		1,60	1,40	1,20					
24,0		1,70	1,35	1,20						25,0		1,50	1,35	1,20					
25,0		1,60	1,35	1,20						26,0		1,45	1,30	1,20					
26,0		1,45	1,30	1,20						27,0		1,30	1,30	1,20					
27,0		1,30	1,30	1,20						28,0		1,20	1,25	1,20					
28,0		1,15	1,25	1,20						29,0		1,05	1,20	1,15					
29,0		1,05	1,15	1,20						30,0		0,95	1,05	1,15					
30,0		0,95	1,05	1,10						31,0		0,85	0,95	1,00					
31,0		0,85	0,95	0,95						32,0		0,75	0,85	0,90					
32,0		0,75	0,85	0,85						33,0		0,70	0,75	0,80					
33,0		0,65	0,75	0,75						34,0		0,60	0,70	0,70					
34,0		0,60	0,65	0,65						35,0		0,55	0,60	0,60					
35,0		0,50	0,55	0,55						36,0		-	0,50	0,55					