






Cotation : TEREX TCC 45

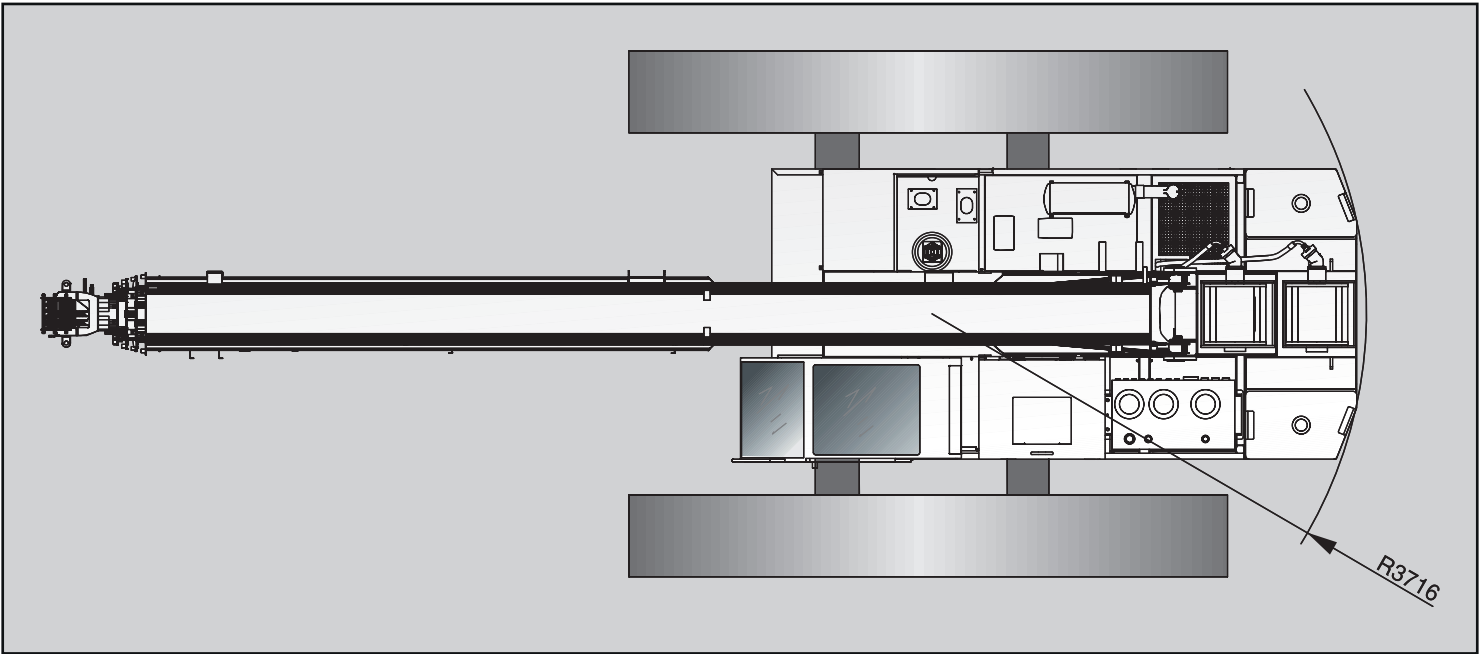

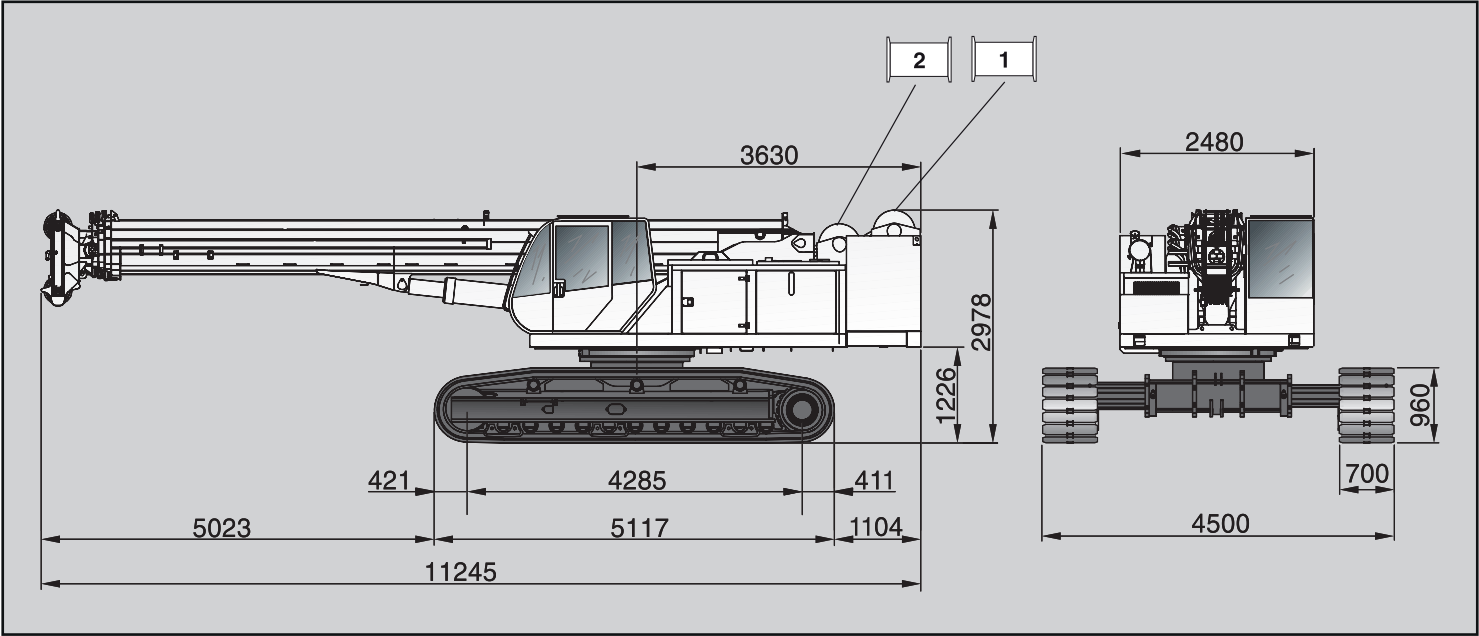

Hauteurs et capacités de levage : Flèche principale

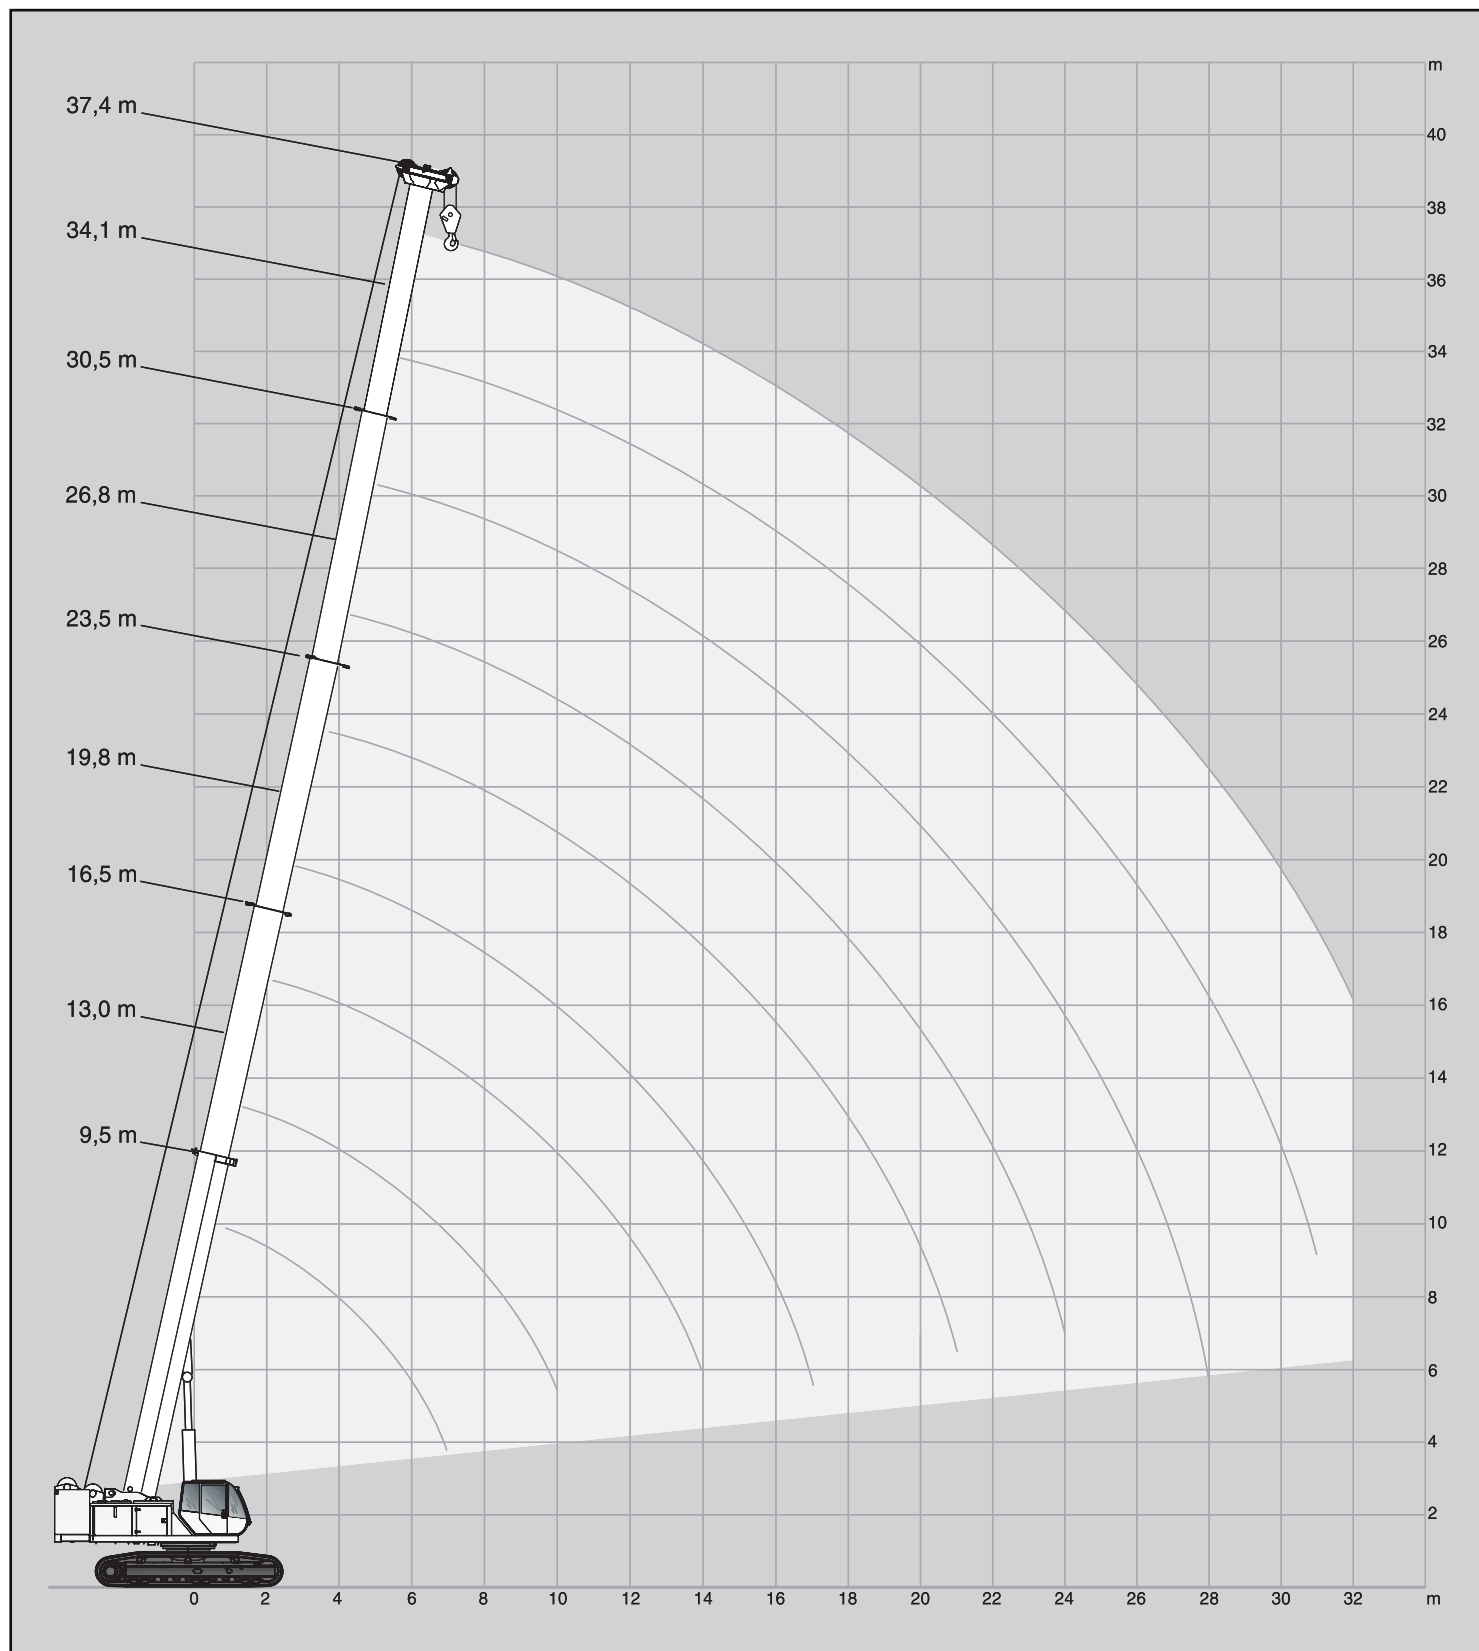

Hauteurs et capacités de levage : Flèche principale


9.2 t		4.50 m		360°		9.8 m/s		EN13000	
9,50 m		13,00 m	16,50 m	19,80 m	23,50 m	26,80 m	30,50 m	34,10 m	37,40 m
m									m
2,5	44,00	-	-	-	-	-	-	-	2,5
3	40,00	36,50	-	-	-	-	-	-	3
3,5	35,70	33,30	23,70	-	-	-	-	-	3,5
4	32,95	30,80	22,00	19,40	-	-	-	-	4
4,5	26,65	25,55	20,45	17,95	-	-	-	-	4,5
5	22,50	22,35	19,00	16,75	15,15	-	-	-	5
6	16,50	16,75	16,80	14,70	13,30	12,20	-	-	6
7	12,95	13,20	13,35	12,75	11,80	10,90	9,65	-	7
8	-	10,80	10,95	11,00	10,15	9,75	8,80	7,45	8
9	-	9,10	9,25	9,30	8,50	8,65	8,00	7,05	9
10	-	7,70	7,90	8,05	7,45	7,35	7,30	6,70	10
11	-	-	6,85	6,95	6,95	6,35	6,50	6,15	11
12	-	-	6,00	6,10	6,20	5,55	5,65	5,75	12
13	-	-	5,30	5,40	5,50	5,25	4,95	5,00	13
14	-	-	4,70	4,80	4,85	4,95	4,40	4,45	14
15	-	-	-	4,30	4,40	4,45	3,90	4,00	15
16	-	-	-	3,90	3,95	4,00	3,50	3,60	16
17	-	-	-	3,55	3,60	3,65	3,15	3,25	17
18	-	-	-	-	3,30	3,35	2,80	2,90	18
19	-	-	-	-	3,00	3,00	2,50	2,60	19
20	-	-	-	-	2,70	2,80	2,25	2,35	20
21	-	-	-	-	2,40	2,50	1,90	2,25	21
22	-	-	-	-	-	2,30	1,70	2,00	22
23	-	-	-	-	-	2,10	1,55	1,87	23
24	-	-	-	-	-	1,90	1,45	1,70	24
25	-	-	-	-	-	-	1,35	1,55	25
26	-	-	-	-	-	-	1,25	1,35	26
27	-	-	-	-	-	-	1,15	1,20	27
28	-	-	-	-	-	-	1,05	1,10	28
29	-	-	-	-	-	-	-	0,93	29
30	-	-	-	-	-	-	-	0,80	30
31	-	-	-	-	-	-	-	0,70	31
32	-	-	-	-	-	-	-	-	32
min 0°	7,65	6,00	3,00	2,00	1,40	0,95	10° stop	15° stop	25° stop
min 0°	-	5,20	3,75	2,75	2,00	1,40	0,80	15° stop	25° stop

Mode 1

Mode 2



Hauteurs et capacités de levage : Flèche principale + Extension

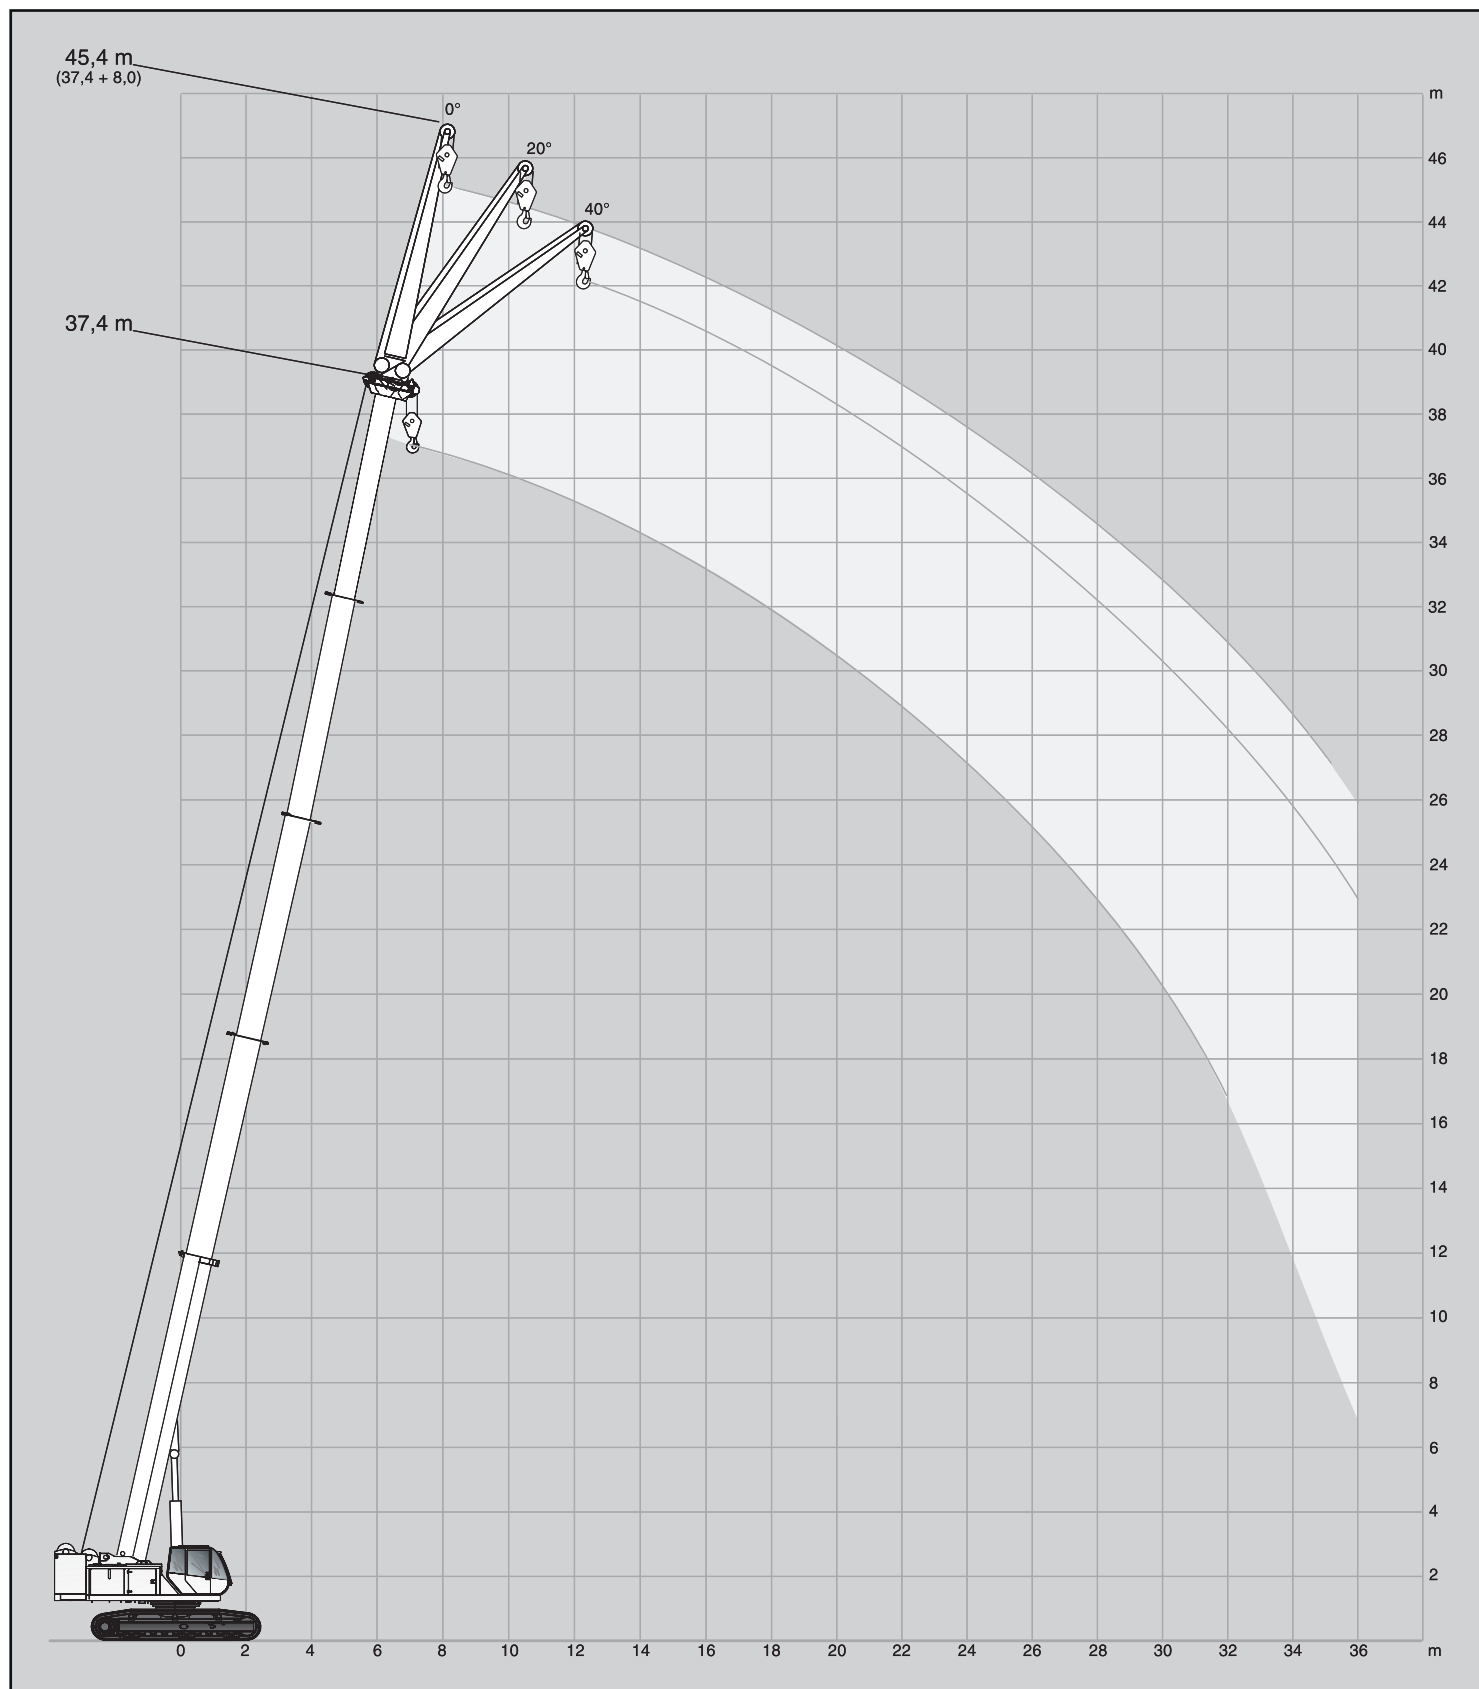

Hauteurs et capacités de levage : Flèche principale + Extension

9.2 t								4.50 m		360°		9.8 m/s		EN13000	
		 34,10 m				37,40 m									
	 8 m				8 m										
	 0°	20°	40°		0°	20°	40°								
m								m							
11	2,90	-	-		-	-	-		11						
12	2,70	-	-		-	-	-		12						
13	2,60	1,75	-		-	-	-		13						
14	2,45	1,70	-		2,50	-	-		14						
15	2,35	1,65	1,35		2,35	-	-		15						
16	2,25	1,60	1,30		2,25	1,60	-		16						
17	2,15	1,55	1,30		2,15	1,60	-		17						
18	2,10	1,55	1,25		2,05	1,55	1,25		18						
19	2,00	1,50	1,25		1,95	1,50	1,25		19						
20	1,95	1,45	1,25		1,85	1,50	1,25		20						
21	1,85	1,45	1,25		1,80	1,45	1,25		21						
22	1,80	1,40	1,20		1,75	1,40	1,20		22						
23	1,75	1,40	1,20		1,65	1,40	1,20		23						
24	1,70	1,35	1,20		1,60	1,40	1,20		24						
25	1,60	1,35	1,20		1,50	1,35	1,20		25						
26	1,45	1,30	1,20		1,45	1,30	1,20		26						
27	1,30	1,30	1,20		1,30	1,30	1,20		27						
28	1,15	1,25	1,20		1,20	1,25	1,20		28						
29	1,05	1,15	1,20		1,05	1,20	1,15		29						
30	0,95	1,05	1,10		0,95	1,05	1,15		30						
31	0,85	0,95	0,95		0,85	0,95	1,00		31						
32	0,75	0,85	0,85		0,75	0,85	0,90		32						
33	0,65	0,75	0,75		0,70	0,75	0,80		33						
34	0,60	0,65	0,65		0,60	0,70	0,70		34						
35	0,50	0,55	0,55		0,55	0,60	0,60		35						
36	-	-	-		-	0,50	0,55		36						
min 	27° stop	31° stop	32° stop		38° stop	39° stop	40° stop		min 						