

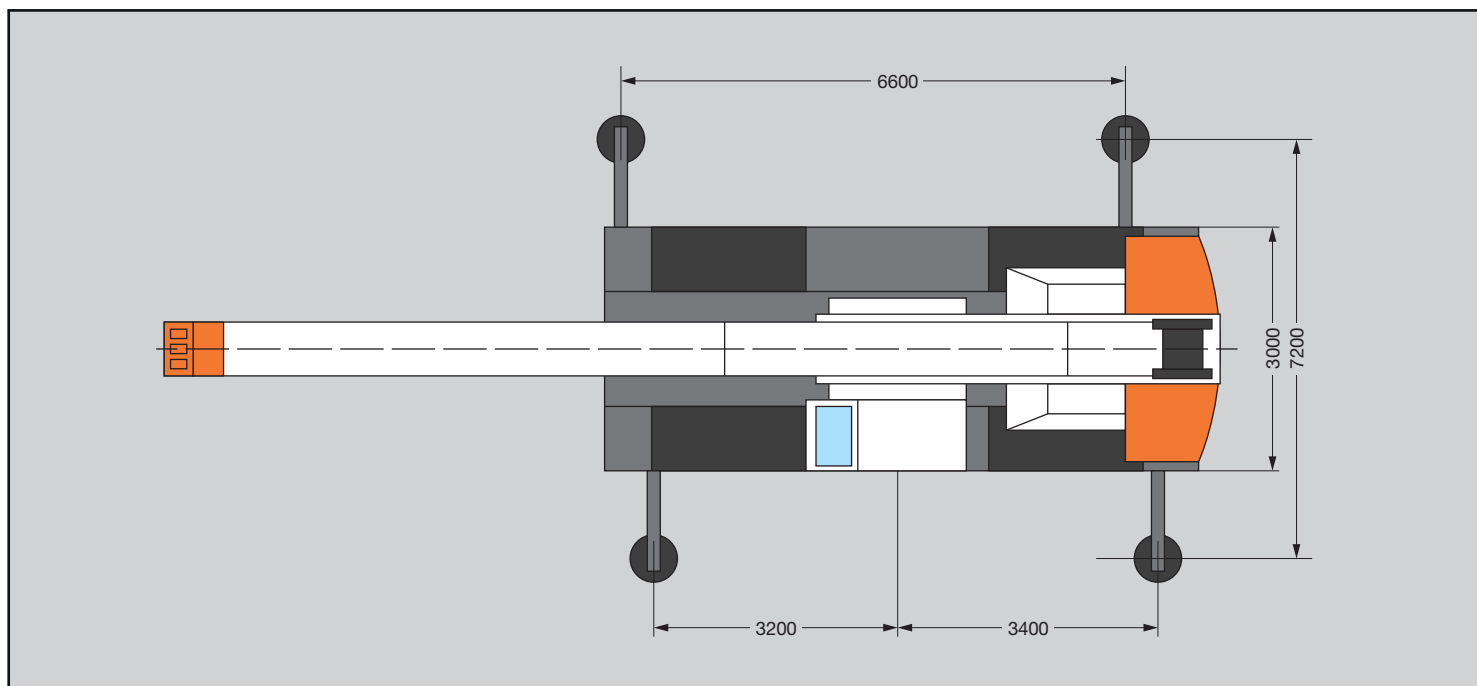


Cotation : TEREX A600

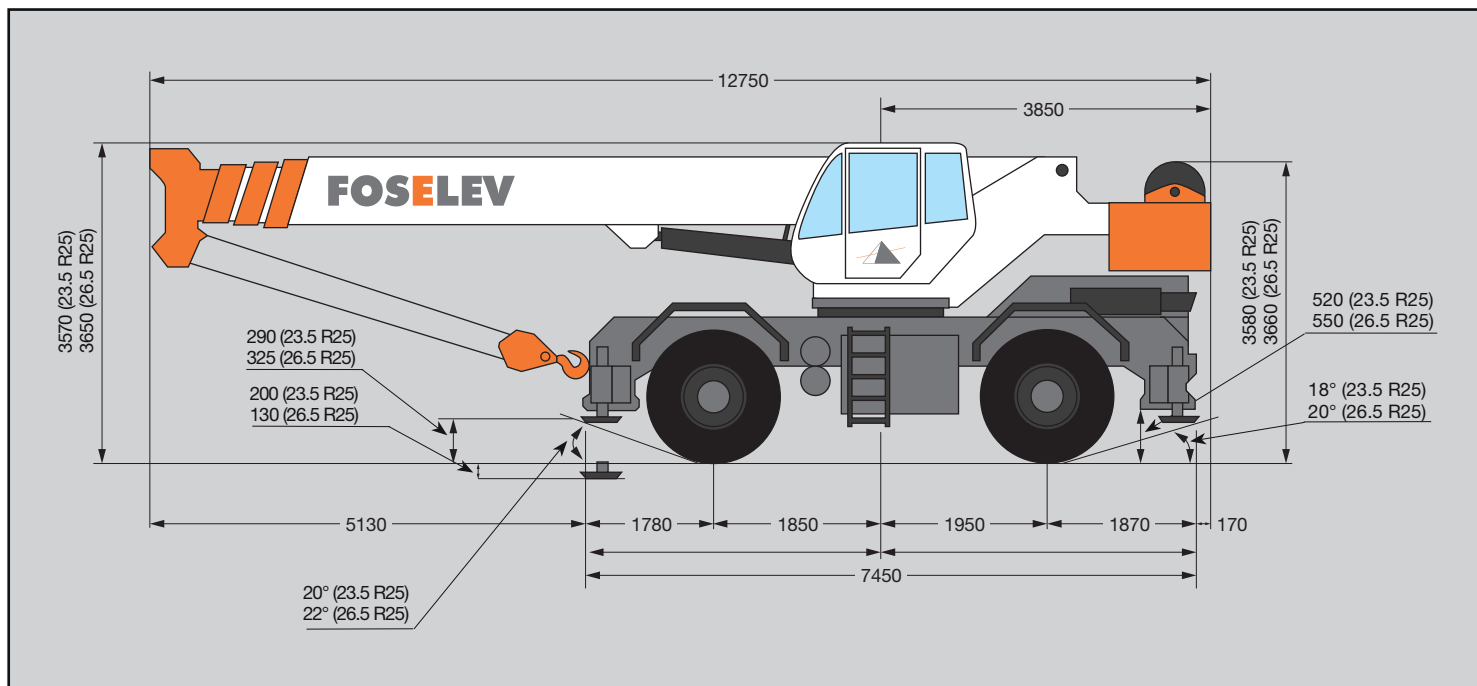

Hauteurs et capacités de levage : Flèche principale + fléchette

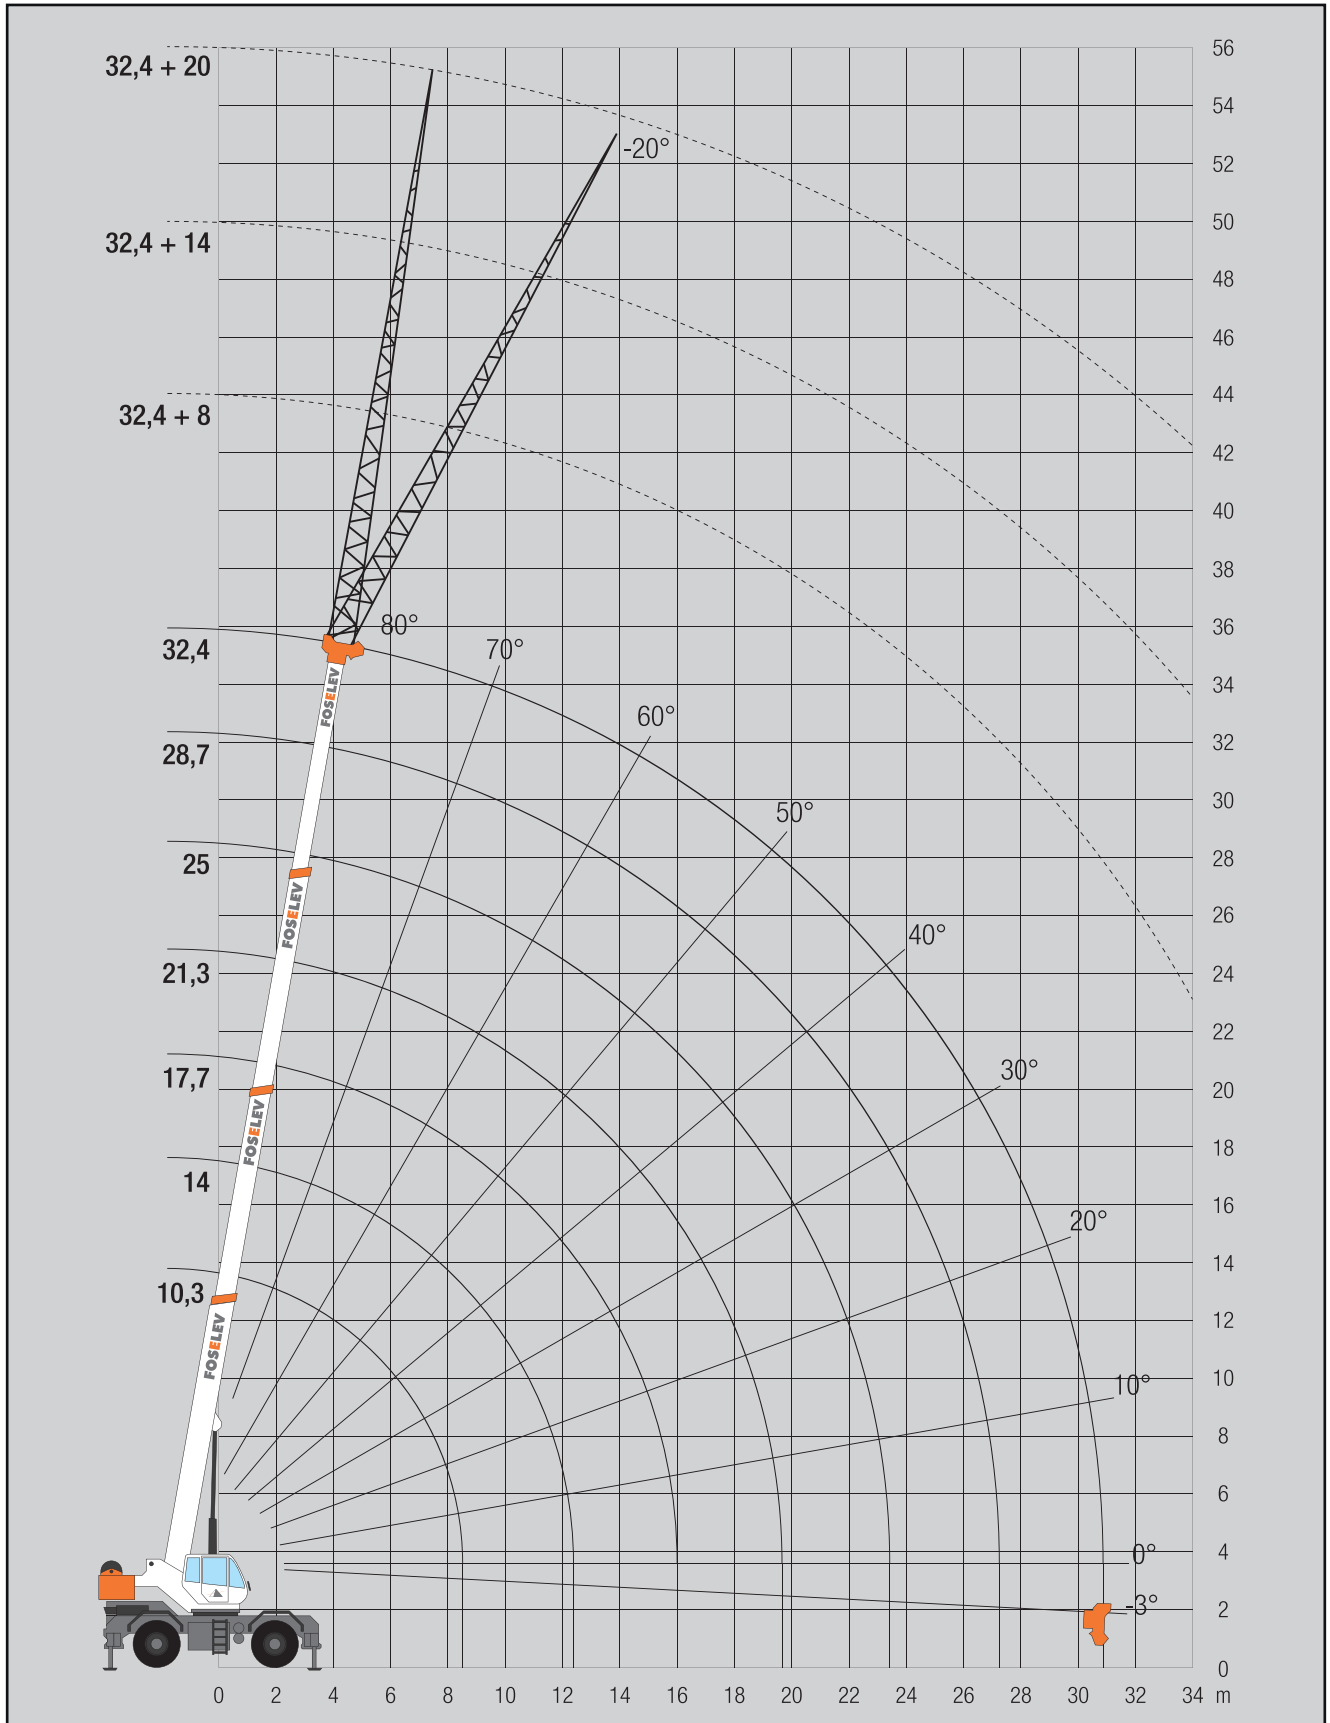

Hauteurs et capacités de levage : Flèche principale + fléchette

 8.7 t  7.2 x 6.6  360°									
		10.3 m	14.0 m	17.7 m	21.3 m	25.0 m	28.7 m	32.4 m	
m									m
3.0		60.0	-	-	-	-	-	-	3.0
3.5		49.2	-	-	-	-	-	-	3.5
4.0		45.0	41.0	33.8	-	-	-	-	4.0
4.5		38.6	36.5	31.2	-	-	-	-	4.5
5.0		36.0	36.0	28.5	24.7	19.9	-	-	5.0
6.0		31.5	29.0	25.5	21.8	18.1	15.5	-	6.0
7.0		25.0	24.0	21.5	19.0	16.4	14.4	11.7	7.0
8.0		19.8	19.5	18.6	16.9	14.7	13.1	11.0	8.0
9.0		-	17.0	16.8	14.7	13.4	12.3	10.6	9.0
10.0		-	14.0	13.8	13.5	12.1	11.2	9.6	10.0
11.0		-	13.0	11.3	11.3	9.8	10.3	8.8	11.0
12.0		-	10.9	9.7	9.7	9.0	9.5	8.2	12.0
13.0		-	-	8.4	8.4	8.4	8.8	7.6	13.0
14.0		-	-	6.8	7.2	7.2	7.1	7.1	14.0
15.0		-	-	6.6	6.4	6.4	6.4	6.4	15.0
16.0		-	-	-	5.8	5.8	5.8	5.8	16.0
17.0		-	-	-	5.1	5.1	5.5	5.6	17.0
18.0		-	-	-	4.5	4.5	4.4	4.3	18.0
19.0		-	-	-	4.0	4.0	4.1	4.0	19.0
20.0		-	-	-	-	3.6	3.4	3.7	20.0
21.0		-	-	-	-	3.2	3.4	3.5	21.0
22.0		-	-	-	-	2.3	2.8	3.1	22.0
23.0		-	-	-	-	2.2	2.7	2.9	23.0
24.0		-	-	-	-	-	2.6	2.8	24.0
25.0		-	-	-	-	-	2.4	2.6	25.0
26.0		-	-	-	-	-	2.0	2.3	26.0
27.0		-	-	-	-	-	-	2.1	27.0
28.0		-	-	-	-	-	-	1.8	28.0
29.0		-	-	-	-	-	-	1.6	29.0
30.0		-	-	-	-	-	-	1.5	30.0

  8.7 t  7.2 x 6.6  360°				EUROPEAN STANDARD EN13000	
--	--	--	--	------------------------------	--

 32.4 m

		8 m				14 m				20 m		
		0°	20°			0°	20°			0°	20°	
m		t				t				t		m
8.0		6.5	-			-	-			-	-	8.0
9.0		6.2	-			-	-			-	-	9.0
10.0		5.9	3.2			3.3	-			-	-	10.0
11.0		5.6	3.1			3.2	-			-	-	11.0
12.0		5.3	3.0			3.0	-			2.0	-	12.0
13.0		5.1	3.0			2.9	-			1.9	-	13.0
14.0		4.8	2.9			2.7	1.6			1.8	-	14.0
15.0		4.6	2.9			2.6	1.6			1.7	-	15.0
16.0		4.3	2.8			2.5	1.5			1.6	0.9	16.0
17.0		4.1	2.8			2.4	1.5			1.5	0.9	17.0
18.0		3.9	2.7			2.3	1.5			1.5	0.8	18.0
19.0		3.6	2.7			2.2	1.4			1.4	0.8	19.0
20.0		3.3	2.6			2.1	1.4			1.4	0.8	20.0
21.0		3.0	2.5			2.0	1.4			1.3	0.8	21.0
22.0		2.8	2.3			1.9	1.4			1.3	0.8	22.0
23.0		2.4	2.2			1.8	1.3			1.2	0.7	23.0
24.0		2.1	2.1			1.8	1.3			1.2	0.7	24.0
25.0		1.9	1.8			1.7	1.3			1.1	0.7	25.0
26.0		1.7	1.6			1.6	1.3			1.1	0.7	26.0
27.0		1.5	1.5			1.5	1.2			1.0	0.7	27.0
28.0		1.3	1.3			1.3	1.1			1.0	0.7	28.0
29.0		1.2	1.2			1.2	1.1			1.0	0.7	29.0
30.0		1.0	1.0			1.1	1.1			0.9	0.6	30.0
31.0		0.9	0.9			0.9	0.9			0.9	0.6	31.0
32.0		0.7	0.7			0.7	0.7			0.8	0.6	32.0