

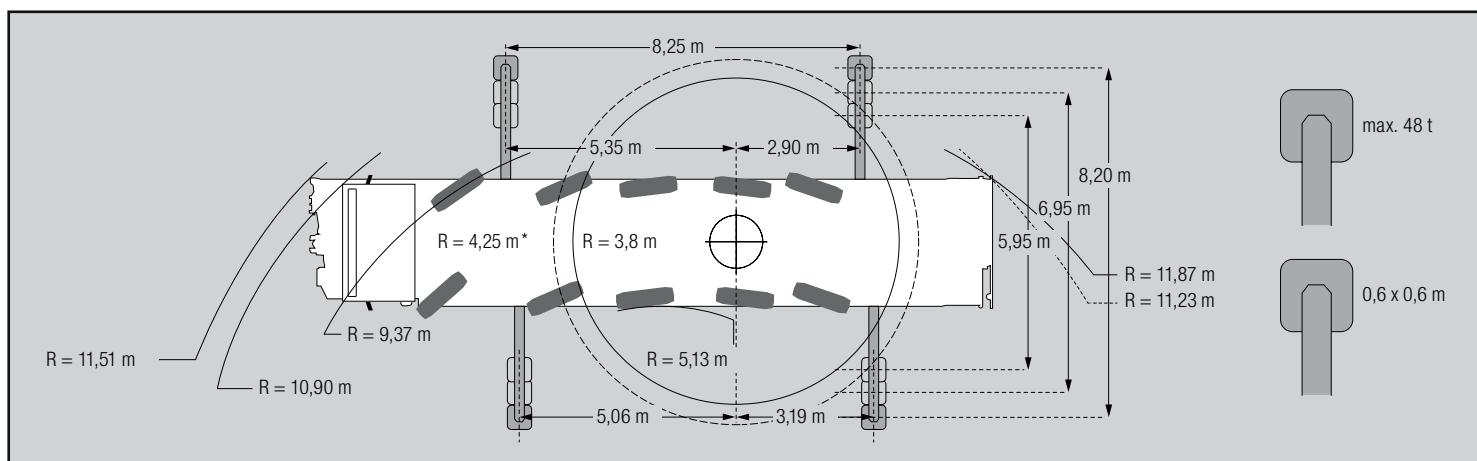


Cotation : LIEBHERR MK 140

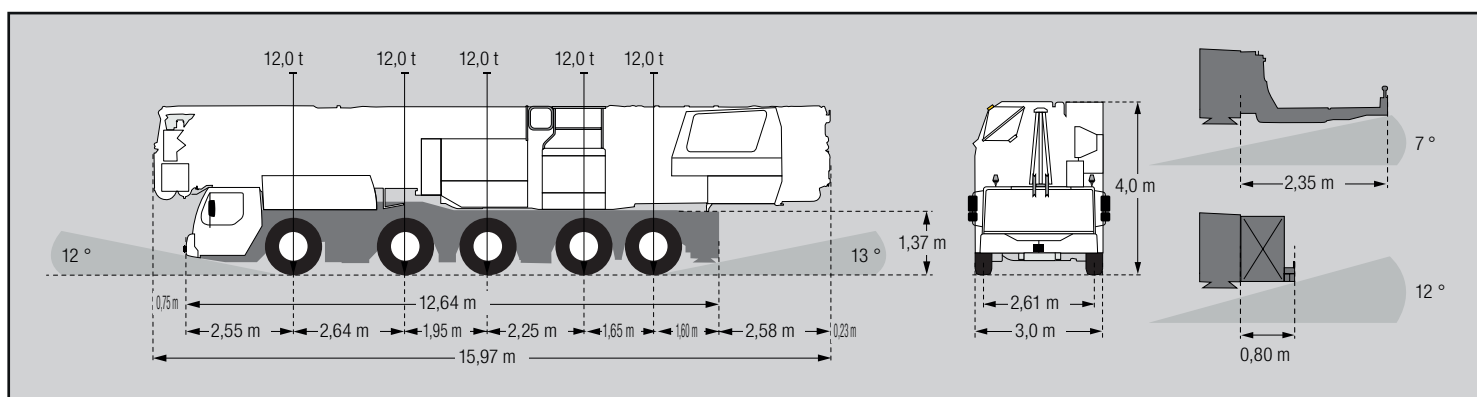


Hauteurs et capacités de levage

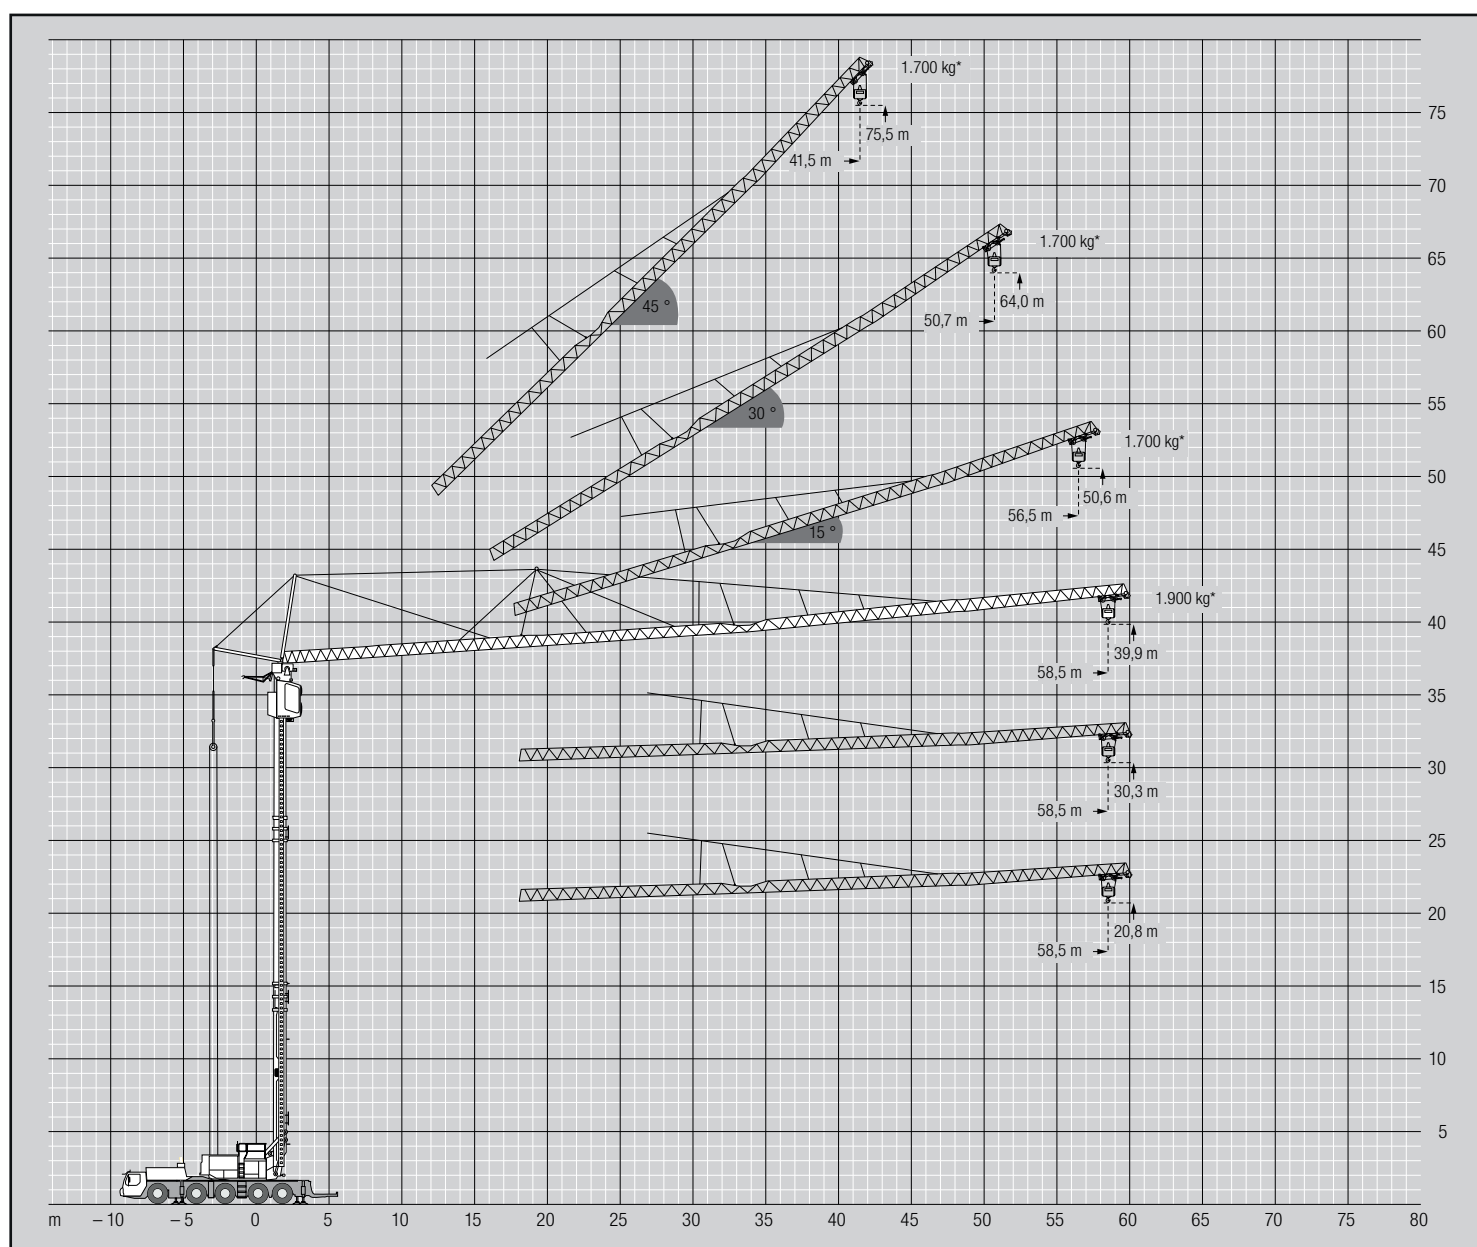


*Avec 9T de lest additionnel


Hauteurs et capacités de levage



						m																			
α°	m		m	kg	3,0	6,0	9,0	12,0	15,0	18,0	21,0	24,0	27,0	30,0	33,0	36,0	39,0	42,0	45,0	48,0	51,0	54,0	57,0	58,5	
0°	58,5		3,3 - 13,4	8000	8000				7290	6220	5400	4750	4230	3790	3420	3110	2830	2600	2390	2200	2040	1890	1760	1700	
			3,3 - 12,0	8000	8000				6630	5630	4870	4270	3780	3380	3050	2760	2520	2310	2120	1950	1800	1670	1550	1500	
	Plus* 2		3,3 - 14,4	8000	8000				7706	6504	5613	4925	4379	3934	3565	3254	2988	2758	2558	2381	2224	2084	1958	1900	
15°	56,5		3,2 - 54,0	1800	1800																			1700	
			3,2 - 50,0	1800	1800																	1750	1630	1550	
30°	50,7		3,0 - 16,0	6000	6000				5320	4540	3940	3480	3100	2790	2530	2310	2120	1960	1810	1700					
			3,0 - 14,0	6000	6000				5610	4680	4000	3490	3080	2740	2470	2240	2040	1880	1730	1600	1500				
45°	41,5		2,7 - 39,0	1800	1800																	1700			
			2,7 - 36,0	1800	1800																	1620	1500		
					 kN																				



				m																							
α°	m		m	kg	3,0	6,0	9,0	12,0	15,0	18,0	21,0	24,0	27,0	30,0	33,0	36,0	39,0	42,0	45,0	48,0	51,0	54,0	57,0	58,5			
0°	58,5		3,3 - 12,7	8000	8000				6650	5430	4570	3930	3440	3050	2730	2460	2240	2040	1880	1730	1610	1490	1390	1350			
			3,3 - 10,5	8000	8000				6930	5440	4460	3760	3230	2830	2510	2240	2020	1840	1680	1540	1420	1310	1220	1130	1100		
15°	56,5		3,2 - 44,0	1800	1800																		1740	1610	1480	1380	1300
			3,2 - 36,5	1800	1800																		1650	1500	1370	1250	1150
30°	50,7		3,0 - 15,0	6000	6000				4860	4070	3490	3040	2680	2390	2150	1950	1780	1630	1500	1400							
			3,0 - 12,0	6000	6000				4660	3780	3160	2700	2350	2070	1840	1650	1490	1350	1230	1130	1050						
45°	41,5		2,7 - 39,0	1800	1800																		1700				
			2,7 - 33,5	1800	1800																		1630	1470	1350		
					 kn																						



						m																									
α°	m		m	kg	3,0	6,0	9,0	12,0	15,0	18,0	21,0	24,0	27,0	30,0	33,0	36,0	39,0	42,0	45,0	48,0	51,0	54,0	57,0	58,5							
0°	58,5		3,3 - 9,1	8000	8000				5890	4590	3730	3130	2680	2330	2050	1830	1640	1480	1340	1220	1120	1030	950	880	850						
			3,3 - 6,8	8000	8000			5960	4390	3440	2800	2350	2010	1740	1530	1360	1210	1090	980	890	810	740	680	620	600						
15°	56,5		3,2 - 31,0	1800	1800																	1660	1490	1340	1210	1110	1010	930	850	800	
			3,2 - 23,5	1800	1800																	1750	1500	1310	1150	1020	910	810	730	660	590
30°	50,7		3,0 - 10,5	6000	6000				5180	4040	3290	2760	2360	2050	1800	1600	1430	1290	1170	1060	970	900									
			3,0 - 7,75	6000	6000			6000	5080	3680	2850	2300	1910	1610	1390	1210	1060	940	830	740	670	600	550								
45°	41,5		2,7 - 30,5	1800	1800																	1620	1450	1300	1200						
			2,7 - 23,5	1800	1800																	1750	1490	1290	1130	990	880	800			
					 kN																										